


Art. 902

Tamponi piatti differenziali P-NP.
Corpo rigido in acciaio speciale e
stabilizzato C10, parti calibranti
cementate e temprate durezza >62
HRC. Capacità Ø 22 – 103 mm

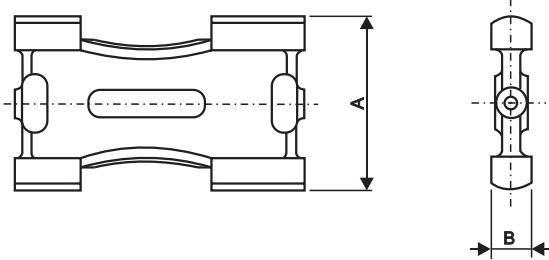

Flat plug gauges "Go-No Go". Rigid body in stabilized special steel C10. The calibrating sections are case-hardened and tempered hardness >62 HRC. Range Ø 22-103 mm.

ØA (mm)	B (mm)
22-28	10
28-38	10
36-45	12
45-55	13
55-70	14
70-86	15
86-103	15