




More information on the website  
[radwag.com/en/info,w1,HDZ](http://radwag.com/en/info,w1,HDZ)

# C315.60/150.OW-1 Personal Scale

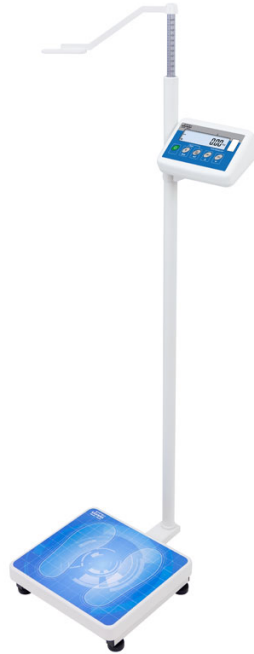

The drawings, photos and graphics used are for illustrative purposes only.

## Functions



Internal battery



Peak hold



GLP Procedures



ALIBI Memory



BMI

## Datasheet

Metrological parameters	
Maximum capacity [Max]	60 / 150 kg
Readability [d]	20 / 50 g
Tare range	-150 kg
OIML Class	III
Physical parameters	
Display	LCD (backlit)
Packaging dimensions	1150×400×110 mm
Net weight	7,8 kg
Gross weight	9,5 kg

Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz and battery
Power consumption max.	5 W
Operation time on batteries	up to 8 h
Environmental conditions	
Operating temperature	0 ÷ +40 °C
Relative humidity	10% ÷ 85% RH no condensation

According to MDR regulations, this scale is not a medical device.



## Accessories

RS 232 cables (scale - printer)  
Cigarette lighter receptacle power supply cables  
Displays  
RS 232 – Ethernet Converter

AP2-1 Current Loop Unit  
RS 232, RS 485 cables  
RS 232 – USB Converter  
RS 232 – RS 485 Converter

## Software


RAD-KEY  
R-LAB

LabVIEW Driver



## Device dimensions



C315.OW



C315.OR

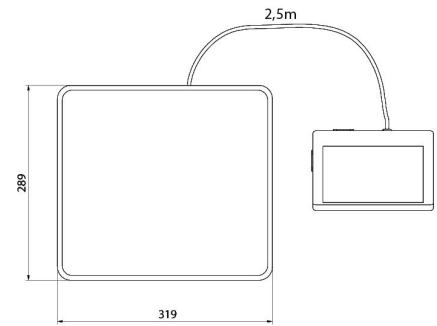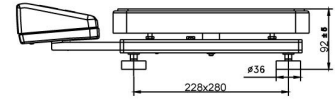

C315.OK