


# P25D

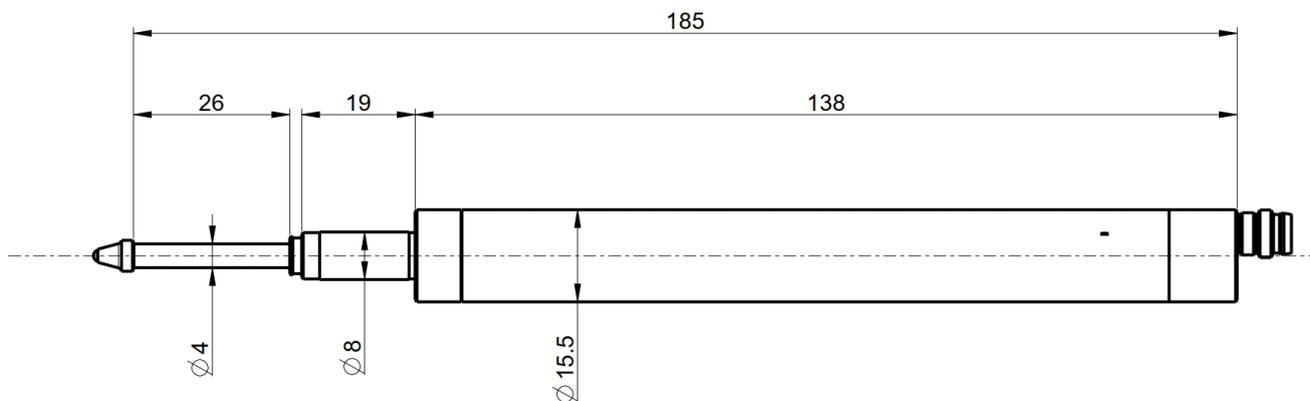

	801-1225	801-1228	801-1229	801-1235	801-1238
Type	P25D M8	P25D USB	P25D OPEN	P25D M8 CF <sup>2</sup>	P25D USB CF <sup>2</sup>
EAN	7,64013E+12	7,64013E+12	7,64013E+12	7,64013E+12	7,64013E+12
Force <sup>1</sup> (N)	0.7 – 1.3			0.15	
Measuring range (mm)	25.apr				
Resolution (µm)	0.01				
Max. Error (µm)	0.8				
Repeatability (µm)	0.1				
Nb mesures/s	up to 100/s, according to configuration <sup>3</sup>				
Output data	M8	USB	OPEN	M8	USB
Protection	IP54				

<sup>1</sup> + 20%, vertical position

<sup>2</sup> CF = constant force : usable only vertically, rod pointing downwards (without spring)

<sup>3</sup> depends on resolution and number of probes per bus