



ST100 range

The LogTag® ST100 probe range is suitable for a wide range of applications in conjunction with compatible external probe data loggers. All materials at probe end of the cable are FDA food rated, including the cable (except ST100B), and terminated with a high quality gold plated MCX connector and an industrial strength PTFE coaxial cable.

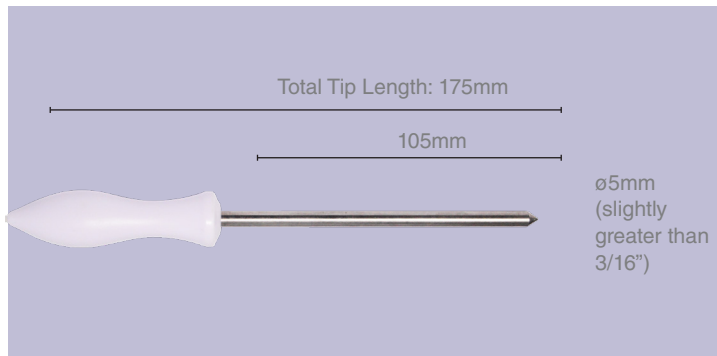


ST100H - Handled Long Tipped Probe

Part #:	ST100H-15: 1.5m (4'11") ST100H-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Stainless Probe Type:	316
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)

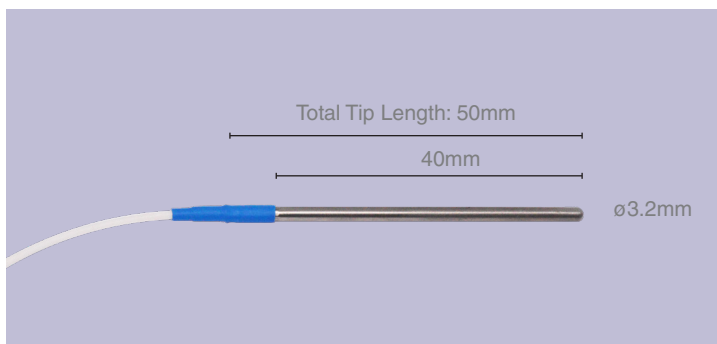


ST100J - Short Round Tip Probe

Part #:	ST100J-15: 1.5m (4'11") ST100J-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Stainless Probe Type:	316
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)

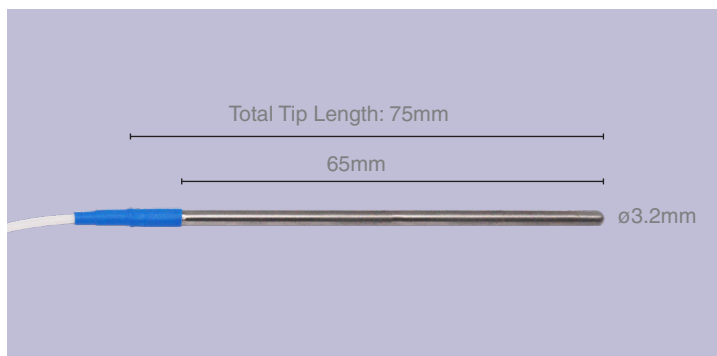


ST100K - Medium Round Tip Probe

Part #:	ST100K-15: 1.5m (4'11") ST100K-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Stainless Probe Type:	316
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)

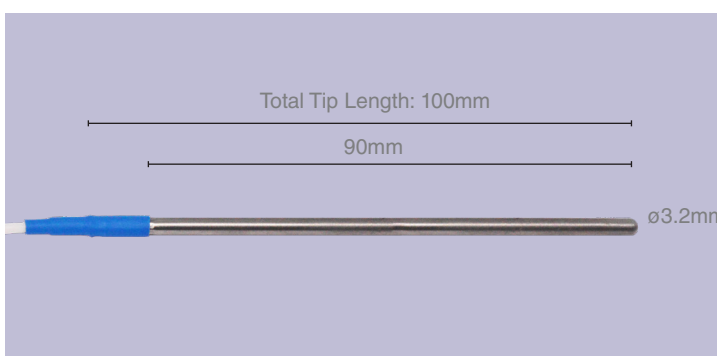


ST100L - Long Round Tip Probe

Part #:	ST100L-15: 1.5m (4'11") ST100L-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Stainless Probe Type:	316
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)

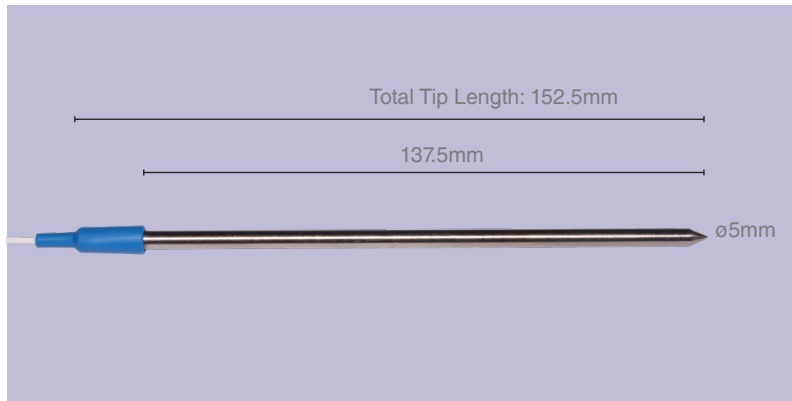


ST100T - Long Tipped Sensor Probe

Part #:	ST100T-15: 1.5m (4'11") ST100T-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Stainless Probe Type:	316
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)

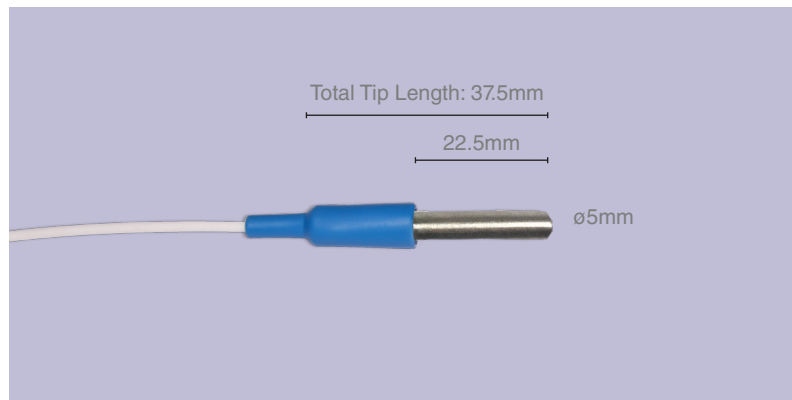

ST100S - Short Round Tip Sensor Probe

Part #:	ST100S-15: 1.5m (4'11") ST100S-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Stainless Probe Type:	316
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)

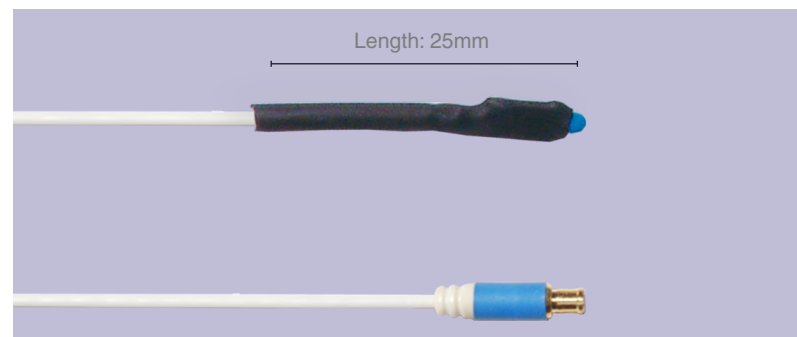

ST100B - Untipped Bare Sensor

Part #:	ST100B-15: 1.5m (4'11") ST100B-30: 3.0m (9'10")
Compatible Loggers:	TREX loggers TRED30 loggers UTRED and UTRED30 loggers
Sensor Temperature Range:	-40 °C to +99 °C (-40 °F to +210 °F)